


MMC5244
Instruction Manual
Smart Socket
ZigBee 3.0



English



- QR コードをスキャンして、日本語のマニュアル、インストールビデオ、機能紹介を入手してください
- QR 코드를 스캔하면 한국어 설명서, 설치 동영상, 기능 가이드를 볼 수 있습니다
- من فضلك قم بفتح رمز الاستجابة السريعة (QR-code) للحصول على دليل المستخدم باللغة العربية وفيديو التثبيت ووصف الوظائف



请扫描二维码获取中文的说明书、安装视频及功能介绍

Product Description

This newly designed wall socket is designed with ZigBee protocol to replace the traditional wall socket. The APP has newly added new pairing mode with Bluetooth enabled, panel indicator mode and relay status setting (power on, power off, power off memory), switch log, child lock, current statistics, overcurrent protection, etc. Enter MOES App, all control modes are effective without any interference. Its design is suitable for different decoration styles, which is really great value for money.

Warnings

Risk of Electric Shock: Electricity can cause personal injury and property damage if handled improperly. If you are not sure about any part of these instructions, please seek professional assistance from a qualified electrician.

Technical Parameters:

Model: ZK-EU(FR/UK)
Voltage: 95~245V AC, 50/60Hz
Wireless Protocol: ZigBee
Max. Current (pure resistive load): 16A (UK 13A)
Max. Load Power: 3000W
Frequency Band: 2.405~2.480GHz
Maximum Radio Transmit Power : < -10dBm

Package list:

Smart Socket *1 User Manual *1 Screw bag *1

Warnings:

Turn off the power at the circuit breaker and test that power is off before wiring.

Installation

- Make sure that the power at the circuit breaker is off before wiring.
- Neutral Wire is required. Confirm the wall box contains a Neutral Wire. If the wall box don't have a Neutral Wire, please try another location at your home or call a professional electrician to install the switch.
- The wire colors indicated in this manual are the usual colors and may differ in some houses.
- Ensure the wire conductors are securely fastened to each wire.
- Ensure the Wi-Fi signal is steady and normally working before wiring and your mobile and Zigbee gateway hub are under the same 2.4GHz WiFi network.
- If you don't have any wiring experience, please call a professional electrician.

Step 1

- Turn off the circuit breaker and use the electrical tester to test the power.
- Ensure the circuit breaker is off before wiring.




Attention:

Please disconnect the power supply before installing or removing the device for avoiding irreversible damage on the device from the electric current or some unpredictable problems such as lamp flashing.

Step 2

- Remove the old switch

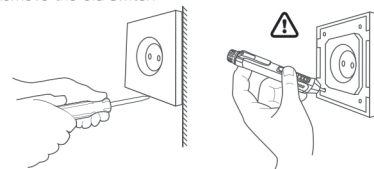

Step 3

- Remove the switch and pull it away from the wall.
- Identify Line/Load Wire (Note: The color of your wire may be different from the color shown on the manual.)

Verify power is off

- We recommend you remove the faceplate from the old switch and use an electrical tester to test all wires connected to the switch to ensure there is no voltage in the circuit.
- You may need to turn off more than one circuit breaker.

Step 4


- Take pictures of the wiring

English


Step 6

- Preparing to install wiring
 - A. Connect the live wire to the "L" terminal
 - B. Connect the neutral wire to the "N" terminal
 - C. Connect the ground wire to the "G" terminal

EU/FR

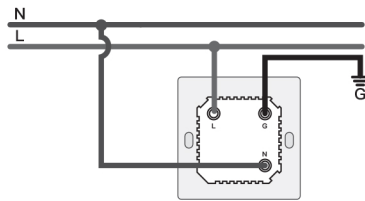


UK

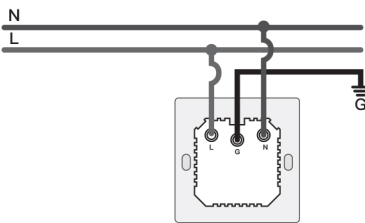

Step 7

- Put the switch into switch box in the wall
- Mount the two side screws
- Install the glass panel (install from up above)
- Finish installation



Add Devices

1 Download Smart Life App



Please scan the QR code or download Smart Life on App store.

2 Registration or Log in

- Download "Smart Life" Application
- Enter the Register/Login interface; tap "Register" to create an account by entering your phone number to get verification code and "Set password". Choose "Log in" if you already have a Smart Life account.

3 Configure the APP to the switch

- Preparation: Ensure the switch has been connected with electricity; ensure your phone has been connected to Wi-Fi and is able to connect to the Internet.

Note:


The switch only supports 2.4G network. If you have connected 5G network, please disconnect 5G network firstly and connect 2.4G network.

Steps for connecting the APP to the device

Ensure the device is within the effective signal coverage of your smart ZigBee gateway for successful connection into the WiFi gateway in Smart Life APP

Method One:


- 1. Make sure your Smart Life APP has successfully connected to a Zigbee gateway.

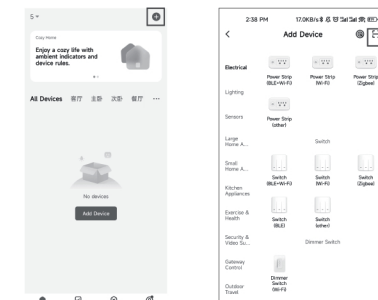

(1)

(2)


English

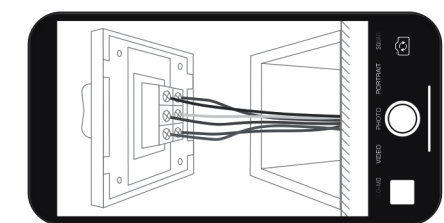

- Follow the wiring diagram to connect the switch wires to the wires in the wall box with the wire conductors.

Step 5

- Remove the panel with screwdriver (Please don't install with electricity power on)




English



Scan the QR code Please connect the device according to the configuration process.

Method Two:

- 1. Make sure your Smart Life APP has successfully connected to a Zigbee gateway.



English

- ③ After the network connection is successful, tap "Continue". An introduction video will appear. After the video ends, tap "Continue" to jump to the Alexa Home page.

- ④ You have now completed the Amazon Echo's configuration process

3.Key step — Link Skill

- ① Tap on "Skills" in the Alexa App menu.
- ② Then search for "App Name". Tap "Enable" to enable the Skill.
- ③ Enter the App account and password, then tap "Link Now" to link your App account to enable the Skill. Now you can start your smart home journey


4.Common commands

Control the device via voice commands, now you can control your smart device with Echo. You can control your device (such as your bedroom light) with the following commands:

- "Alexa, turn on <device name>"
- "Alexa, turn off <device name>"

- 2. Press and hold the button for about 7 seconds, until the indicator on the switch flash fast after 3 seconds. Repair is successful.

- 3. Enter the gateway. Please follow the picture below to finish as "Add subdevice" → LED already blink, and the connecting will take about 10-120 seconds to complete depending on your network condition.

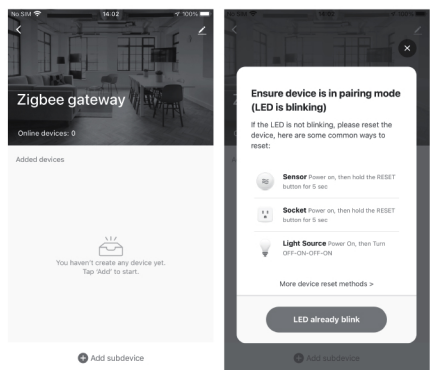

English

WARRANTY INSTRUCTIONS


Dear Sir or Madam, thank you for purchasing the product. We hope you'll enjoy using it.

The warranty for the products in the warranty card is hereby granted as follows.

As a condition of using the warranty, you must comply with the following terms and procedures:

1. Products are covered by a 24-month warranty, effective from the date of purchase of the covered product by a retail customer.
2. In order to exercise warranty rights, the purchaser must present: a) Warranty card, b) Proof of purchase (VAT invoice, financial receipt or other document confirming the actual date of purchase), unless the purchase date of the product comes from the warranty card.
3. If product quality problems occur within 24 months from the date of receipt, please prepare the product and packaging and go to the place or store where you purchased it to apply for after-sales maintenance. If the product is damaged due to personal reasons, a certain maintenance fee will be charged.
4. We recommend that you properly protect the goods when delivering them to the guarantor - for this purpose, we recommend that you use the original packaging with padding to ensure safe transportation. If you choose to use replacement packaging, we recommend that you ensure that the product is adequately protected from damage during shipping. We recommend that you place an appropriate sticker on your packaging indicating the product's susceptibility to impact, such as "Warning Glass".
5. Reported defects covered by the warranty will be

- 4. Add the device successfully, you can edit the name of the device to enter the device page by click "Done".

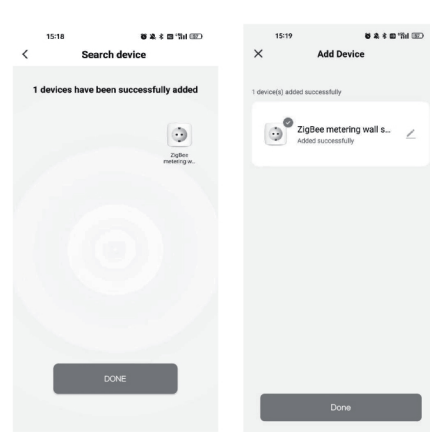

English

RECYCLING INFORMATION

All products marked with the symbol for separate collection of waste electrical and electronic equipment (WEEE Directive 2012/19 / EU) must be disposed of separately from unsorted municipal waste. To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.

6. After checking and determining the legality of the warranty claim, the Guarantor's services will repair the product within a reasonable time, not exceeding 30 days from the date of delivery of the goods to the Guarantor. However, if hard-to-find spare parts are required, this deadline may extend the time it takes to deliver the part from the manufacturer's factory.
7. The warranty does not include the performance of maintenance and similar operations specified in the user manual, and users are obliged to do it themselves.
8. If defects occur due to natural wear and tear during use, the warranty does not cover it.
9. The warranty does not cover:
 - a) Mechanical damage caused by the user's fault and product defects caused by such damage.
 - b) Damage caused by improper use of the product.
10. The rights under the guarantee will expire in the following circumstances:
 - a) Remove the warranty seal from the product.
 - b) Remove the serial number from the product.
 - c) Take action to eliminate physical defects in the product outside of authorized service.
 - d) Use non-original parts and consumables.

- 5. Click "Done" to enter the device page to enjoy your smart life with home automation.



How to Reset/Re-pair ZigBee code

Press and hold the button for about 7 seconds, until the blue indicator on the switch flash fast after 3 seconds. Reset/Re-pair is successful.

English

RECYCLING INFORMATION

All products marked with the symbol for separate collection of waste electrical and electronic equipment (WEEE Directive 2012/19 / EU) must be disposed of separately from unsorted municipal waste. To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.



Enter Smart Life Skill in Alexa APP

- 1. Complete product networking configuration in the App

Complete the device's networking configuration according to the prompts in the App.

Note: In the App, change the name of the device to an easily identifiable name such as Alexa; names are usually in English, such as "bed light".

- ① Make sure your Amazon Echo device is powered on and connected to a Wi-Fi network.
- ② Open the Alexa APP on your phone and log in
- ③ tap on the menu in the upper left corner of the Home page, select "Settings" and tap "Set Up A New Device" to set up the Amazon Echo.
- ④ Choose your Amazon Echo device type and language for connecting.
- ⑤ Press and hold the small dot on the device until the light turns yellow.
- ⑥ Click "Continue" to connect to the hotspot, connect to the Amazon Echo hotspot, and return to the APP page.
- ⑦ Click "Continue" to find and connect to your home Wi-Fi network.
- ⑧ Amazon Echo will take a few minutes to try to connect to the network.

English

WARRANTY CARD

Product Information

Product Name _____

Product Type _____

Purchase date _____

Warranty Period _____

Dealer Information _____

Customer's Name _____

Customer Phone _____

Customer Address _____

Maintenance Records

Failure date	Cause Of Issue	Fault Content	Principal

English

16

English

17

English

18

English

19

English

20